


MEGAFORM
PRE-ASSEMBLED

ASSEMBLED
ON SITE

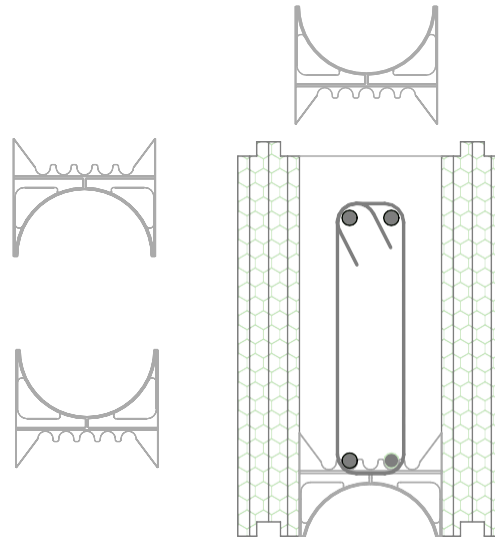

HALF BRIDGE
FOR LINTEL STEEL PLACEMENT

MegaForm I.C.F is quick to assemble. the option to assemble onsite allows for placement of the block sides around existing reinforcing steel, especially where vertical reinforcing is installed. Other options for onsite assembly allow for closed stirrup reinforcing and links, used for lintel beams and foundation beams to be installed prior to installing the inner block side. Half bridges allow for cut to height reinforcing placement over lintels. This saves waste and time, whereas a fully moulded insert bridge does not work with certain dimensions.